


## 无刷电机--BL65-100, 100W

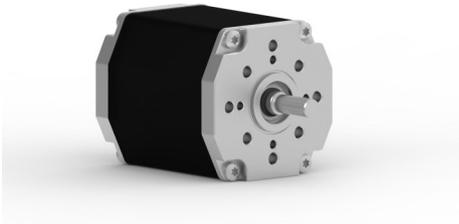


- 适配行星减速箱--Planetary gearbox available
- 适配蜗轮蜗杆减速箱--Worm gearbox available
- 适配制动器--Brake available
- 适配控制器--Controller available
- 适配编码器--Encoder available
- 更多客户要求--More request from customer

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>▶ 100瓦, 10极高动态响应三相无刷直流电机</li> <li>▶ 需要额外的驱动器来运行电机</li> <li>▶ 可根据需求定制不同电压的绕组</li> <li>▶ 可根据需求提供不同尺寸的前轴和尾轴</li> <li>▶ 较高的功率密度和紧凑结构设计</li> <li>▶ 防护等级为IP50, 可根据需求提供更高的等级</li> <li>▶ 长寿命, 免维护, 绝缘等级E</li> </ul> | <ul style="list-style-type: none"> <li>▶ 100W high dynamic 3-phase brushless DC motor 10-poles</li> <li>▶ Additional electronics is needed to run this motor</li> <li>▶ Special voltage windings available on request</li> <li>▶ Different shaft size available for both sides on request</li> <li>▶ High power density and compact design.</li> <li>▶ Protection class IP50, higher class available on request</li> <li>▶ Longer lifetime, maintenance-free, insulation class E</li> </ul> |
|--|---|

### 24V数据和曲线--Data and curve of 24V

额定电压 Nominal voltage	24 VDC	转矩常数 Torque constant	6.4 Ncm A <sup>-1</sup>
额定电流 Nominal current	6.02 A	终端电阻 Terminal resistance	0.192 Ω
额定转矩 Nominal torque	34.6 Ncm	终端电感 Terminal inductance	0.84 mH
额定转速 Nominal speed	2980 rpm	峰值电流(2 sec.) Peak current(2 sec.)	19 A
堵转扭矩 Stall torque	100 Ncm	转子惯量 Rotor inertial	70 gcm <sup>2</sup>
空载转速 No load speed	4580 rpm	电机重量 Weight of motor	0.9 kg

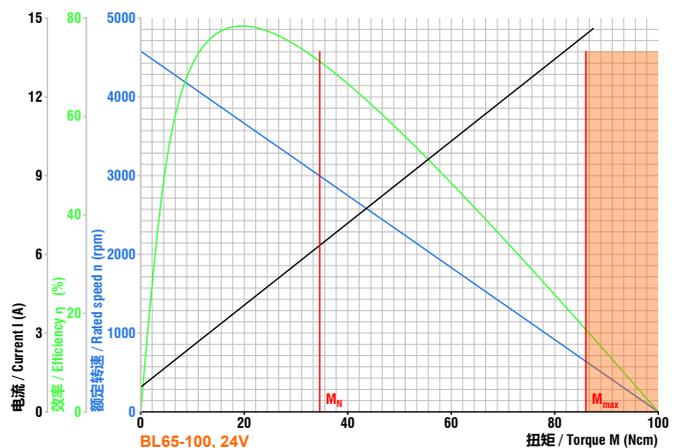

### 尺寸为毫米-Dimensions in mm

